

■ SPECIFICATIONS :


- Voltage Rating: 250V AC / DC
- Current Rating: 5A AC / DC
- Withstanding Voltage: 1000V AC/minute
- Temperature Range: -25C°~+85C°
- Insulation Resistance: 1000MΩ Min.
- Contact Resistance: 20MΩ Max.
- *Mates with LDZY C3030HF series Housing

■ *Material:

Terminal: Phosphor Bronze
 Plating: Tin Plated Or Gold Flash
 Or Contact Gold Flash Bottom Nickel

C3030 T F - P XX -A
 ① ② ③ ④ ⑤ ⑥

- ① Series No.:
- ② Category: T- Terminal
- ③ Terminal Type: F-mate with male housing
- ④ Material: P-Phosphor Bronze, B-Brass
- ⑤ Plating : G1-Gold Flash, T1- Tin Plated
 GT- Contact Gold Flash Bottom Nickel(镀半金)
- ⑥ Other Types: A-A Type(新模)

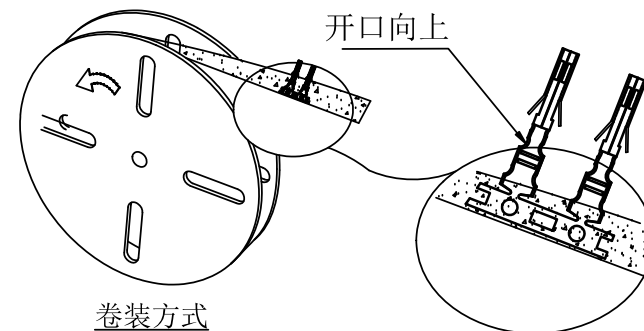

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
C3030TF-PG1-A	AWG#20-#24	1.6mm(max)	Phosphor Bronze	gold flash	10,000pcs
C3030TF-PT1-A	AWG#20-#24	1.6mm(max)	Phosphor Bronze	Tin Plated	10,000pcs
C3030TF-PGT-A	AWG#20-#24	1.6mm(max)	Phosphor Bronze	Contact Gold Flash Bottom Nickel	10,000pcs

						一般公差 GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10				LDZY® 东莞市蓝雁电子有限公司 Electro DongGuan LDZY Electronics CO.,LTD. 核准 APPD 审核 CHK 绘图 DR 日期 DATA				料号 PART NO C3030TF-PXX-A			
										品名 TITLE 3.0mm Crimp Style connectors							
2023-3-20	A	B	修正耐电压数值														
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION			审核 CHK	核准 APPD	角法 PROJECT	周立鸿	兰雄	唐文舜	2021/05/24	单位 UNIT MM	比例 SCALE 1/1	图号 NUMBER LDZY-8803	版次 REV B	