

■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25° C~+80° C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

■ Reference Informations:


*Material:

PIN: Brass
 Plating Method: Tin-plated、Matte Tin plated、Gold Flash
 Wafer: LCP,UL94V-0
 Color: Black



*Mates with LDZY C3030 series Housing

C3030 W V F - 2NP - L0 BK X K X
 ① ②③④ ⑤ ⑥ ⑦⑧⑨ ⑩


- ① Series No.
- ② Category: W-wafer
- ③ Welding Board Angle: V- Straight 180° R-Vertical 90°
- ④ Colloid Feature: F-Double location column
- ⑤ Circuit No.: 202-2x1PIN.....224-2x12PIN,
- ⑥ Material: L0-LCP,UL94V-0;
- ⑦ Color: BK-Black
- ⑧ Plating Method: T-Tin-plated, M-Matte Tin plated
G-Gold Flash
- ⑨ Option: K- With "K" (打K脚)
- ⑩ Option: Normal-Blank(锡脚3.2袋装)、P-锡脚3.2 (盘装)

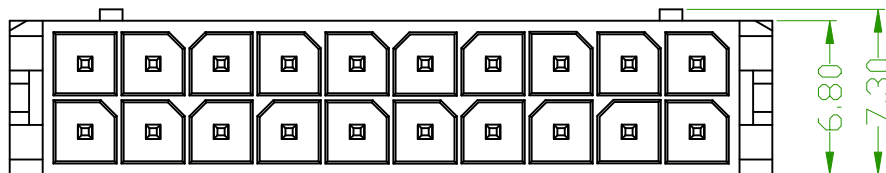


1.45

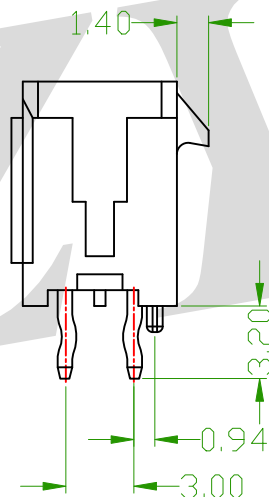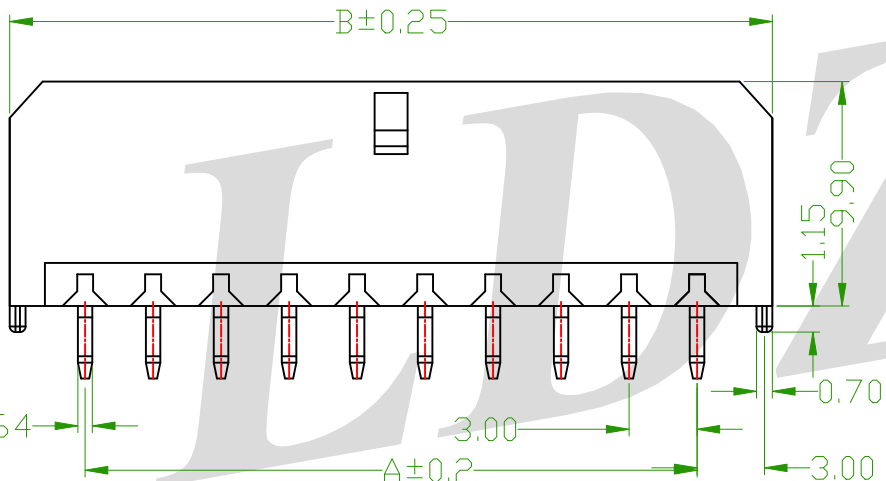

SQ 0.64

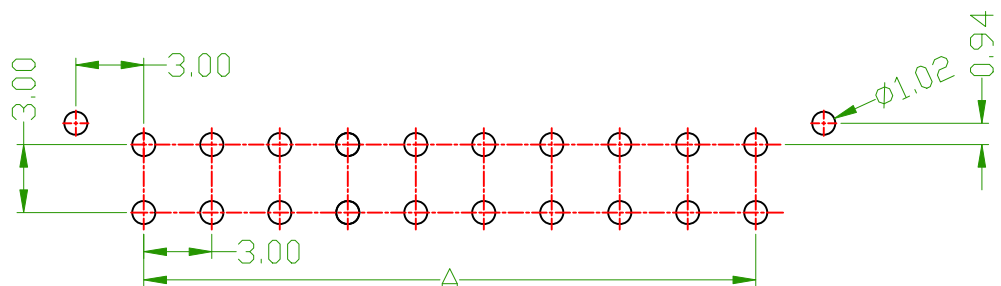

P. C. B LAYOUT

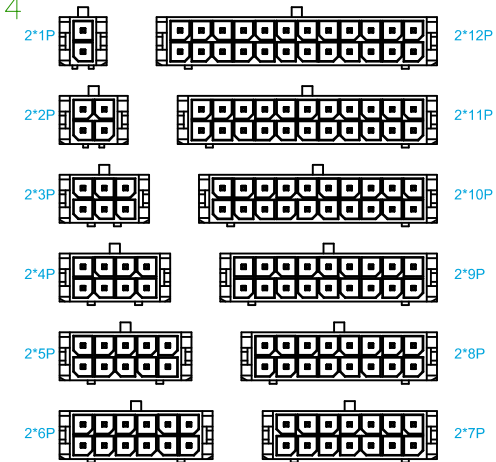

Poles	Dimensions (mm)	
	A	B
2*01	---	6.65
2*02	3.00	9.65
2*03	6.00	12.65
2*04	9.00	15.65
2*05	12.00	18.65
2*06	15.00	21.65
2*07	18.00	24.65
2*08	21.00	27.65
2*09	24.00	30.65
2*10	27.00	33.65
2*11	30.00	36.65
2*12	33.00	39.65

						<p>一般公差 GENERAL TOLERANCE</p> <p>.X ±0.3</p> <p>.XX ±0.2</p> <p>.XXX ±0.1</p>				<p>LDZY® 东莞市蓝雁电子有限公司 Electronics DongGuan LDZY Electronics CO.,LTD.</p>				<p>料号 PART NO C3030WVF-2NP-L0BKXKX</p>			
						<p>核准 APPD 审核 CHK 绘图 DR 日期 DATA</p>				<p>品名 TITLE 3.0mm Crimp Style connectors</p>							
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT	周立鸿	兰雄	易小许	2021/02/20	单位 UNIT	比例 SCALE	图号 NUMBER	版次 REV			
											MM	1/1	LDZY-8802	A			